

# USAOK

## GENERAL BATTERY SERIES 6FM12 12V12AH/20HR

GB series product is the general Valve Regulated Lead Acid battery with AGM technology. GB series batteries have are widely applied to energy reservation system, traction system, starting devices, emergence system and so on.

### Application

- Lighting system
- Security system
- Electric toy
- Medical equipment
- Telecommunication system
- Power systems
- UPS
- Electric tools

### General Features


- Maintenance free
- Convenient for installation
- Safety and no leakage
- UL approval
- Excellent recharge and discharge performance
- Low self-discharge rate

### Battery Construction

• Component	Material
• Positive plate	Lead dioxide
• Negative plate	Lead
• Container	ABS
• Cover	ABS
• Safety valve	Rubber
• Terminal	Copper
• Separator	AGM glass
• Electrolyte	Sulfuric acid

### General Specifications

<b>Battery Model</b>	6FM12 (12V12 AH/20 HR)			
<b>Designed Service Life</b>	5 years			
<b>Capacity (25°C)</b>	20HR	10HR	5HR	1HR (7.2A)
	(0.6A)	(1.12A)	(2.04A)	
	12.00AH	11.20AH	10.20AH	7.20AH
<b>Dimension:</b> mm (inch)	Length	Width	Height	Total Height
	151.7 (5.97)	98.9(3.89)	96.0(3.78)	100.7(3.96)
<b>Approx. Weight</b>	3.56 Kg (7.85 lbs)±5%			
<b>Internal Resistance</b>	Fully charged at 25°C: 0.022 Ohm			
<b>Self-discharge</b>	3% of capacity declined per month at 25°C			
<b>Capacity Affected by Temp. (20HR)</b>	40°C	25°C	0°C	-15°C
	105%	100%	85%	65%
<b>Charge Voltage (25°C)</b>	Cycle use		Stand-by use	
	14.4-15.0V(-24mV/°C), Max. Current: 3.60 A		13.5-13.8V (-18mV/°C)	

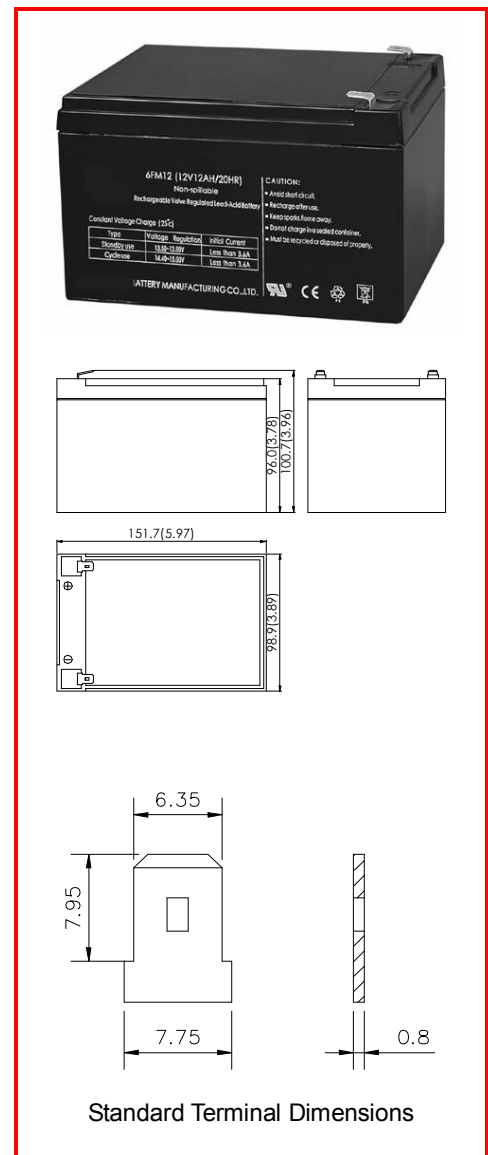

## Constant Current Discharge Data

### Constant Current Discharge Data Sheet (Amperes at 25°C)

End Voltage/cell	Minute (s)					Hour (s)				
	5	10	15	30	1	3	5	10	20	
1.80	40.60	28.80	22.60	12.70	7.75	3.06	2.02	1.12	0.59	
1.75	42.10	29.00	23.20	13.00	7.85	3.09	2.05	1.14	0.60	
1.70	43.50	29.90	23.70	13.30	7.94	3.12	2.07	1.16	0.61	
1.65	45.00	30.80	24.30	13.50	8.04	3.15	2.10	1.17	0.61	
1.60	46.40	31.70	24.80	13.80	8.14	3.18	2.12	1.18	0.61	

## Constant Power Discharge Data

### Constant Power Discharge Data Sheet (Watts at 25°C)

End Voltage/cell	Minute (s)					Hour (s)				
	5	10	15	30	45	1	2	3	5	
1.80	77.60	54.60	43.90	25.40	19.60	15.50	8.16	6.24	4.08	
1.75	79.80	55.60	44.60	25.80	19.90	15.70	8.25	6.31	4.11	
1.70	81.90	56.60	45.30	26.20	20.10	15.80	8.33	6.37	4.14	
1.65	84.10	57.70	46.00	26.60	20.40	16.00	8.42	6.44	4.17	
1.60	86.20	58.70	46.70	27.00	20.60	16.10	8.50	6.50	4.20	

## End Voltage

Discharge Rate	Discharge Current	End Voltage (V/cell)
20h	0.05C <sub>20</sub> A (I <sub>20</sub> )	1.75
10h	0.09C <sub>20</sub> A (I <sub>10</sub> )	1.75
3h	0.25C <sub>20</sub> A (I <sub>3</sub> )	1.75
1h	0.60C <sub>20</sub> A (I <sub>1</sub> )	1.60

## Storage Time VS Charge Time

Storage Time	Top up Charging Recommendation
Less than 6 months from production or previous top up charge	Maximum of 16 hours at a constant voltage of 2.40VPC
Less than 12 months from production or previous top up charge	Maximum of 20 hours at a constant voltage of 2.40VPC
Less than 6 months from production or previous top up charge	Maximum of 8 hours at a constant current of 0.1 C A
Less than 12 months from production or previous top up charge	Maximum of 10 hours at a constant current of 0.1 C A


Zhongshan Long Way Battery Manufacturing Co., Ltd. Address: Jishui Industrial Area, Nantou Town, Zhongshan, Guangdong Province, China.

Tel: 86-760-3132289 Fax: 0086-760-3132283


Website: <http://www.longwaybattery.com> Email: [sales@longwaybattery.com](mailto:sales@longwaybattery.com) LW-IOP-6FM12.A2 April 2007

NOTE: This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Long Way for the latest information.


## Performance Curves and Charts

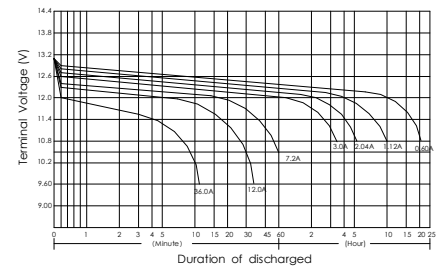


Discharge Characteristic (25°C)

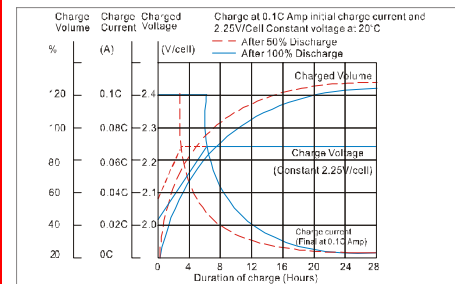

Charge Characteristic (25°C)

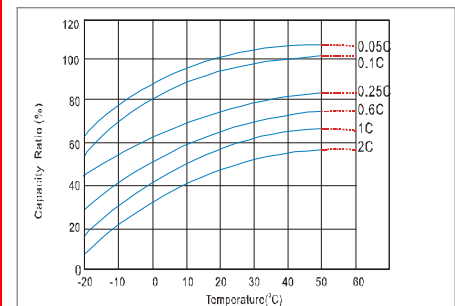

Effect of temperature on capacity

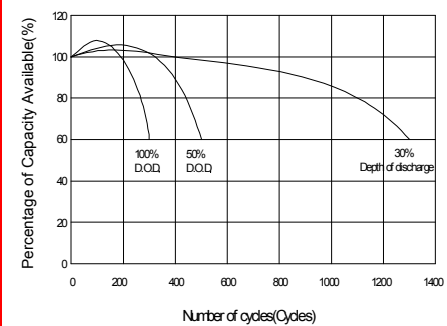

Number of cycles Vs. Depth of Discharge

